



USB 3.2 Gen 1 4K UHD at 30Hz Mini Docking Station

Ultra slim Design

- Ultra Slim size:
9.5 x 9.4 x 4.4 cm / 3.74 x 3.7 x 1.73 inch (LxWxH)
- Supports dual External monitors via HDMI™ 1.4 and DVI-I via Displaylink DL-5900 chipset
- USB 3.2 Gen 1 downstream port x 4
- Supports BC 1.2 charging x2
- Supports Gigabit Ethernet (10/100/1000)
- Supports Audio 2.1 channel (3.5 mm Audio combo jack)
- Supports Resolutions up to 4K UHD 3840x 2160p 30Hz (HDMI™) and 2048 x 1152 60Hz (DVI-I)
- Designed for Laptops and Ultrabooks



CSV-3104D MANUAL

Introduction

The Club 3D USB 3.2 Gen 1 4K UHD at 30Hz Mini Docking Station design allows you to expand the outputs of your laptop or ultrabook so it can be used as a traditional desktop PC.

With the advanced DisplayLink™ DL-5900 chip inside, Club3D's USB 3.2 Gen 1 4K UHD at 30Hz Mini Docking Station is able to offer you the perfect solution to connect all your favorite USB devices (*4), as well as connect two external monitors via HDMI™ and a DVI-D Connector, in addition to an Ethernet network Connection it also offers an Audio/Microphone output all via a single USB cable.


Because of its convenient and compact design, the Club 3D USB 3.2 Gen 1 4K UHD at 30Hz Mini Docking Station is a versatile tool that provides you maximum functionality from your Small desktop replacement or mobile companion.

Design:

The Club3D USB 3.2 Gen 1 4K UHD 30Hz Mini Docking Station has a modern and minimalistic design and combines the functionality normally found in larger Docking Stations with a convenient, solid and highly portable casing. The miniature size makes it easy to take it with you wherever you go. Use it without external power for maximum mobility*. (*Limits functionality)

Outputs:

- HDMI™
- DVI-I
- 4 x full size USB 3.2 Gen 1
- RJ45 Ethernet
- 3.5mm Audio, Mic Combo jack

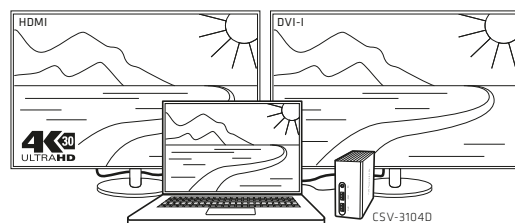

Monitors Supports via:
HDMI™ Video 4K UHD at 30Hz 3840 x 2160 pixels
DVI-I Video 2048x1152 pixels

Features:

- Ultra slim size:
9.5 x 9.4 x 4.4 cm / 3.74 x 3.7 x 1.73 inch (LxWxH)
- USB 3.2 Gen 1 downstream port x4
 - Downward compatible with USB 2.0/1.1
 - Support BC 1.2 charging x2
- Video outputs
 - HDMI: resolution up to 3840x2160 pixels UHD 30Hz
 - DVI-I: resolution up to 2048x1152 pixels
- Support Bus-powered mode
- Support Audio 2.1 channel (Audio combo jack)
- Support Gigabit Ethernet


System Requirements

- Supports Windows™ and Mac OSX™

Warning Safe Usage: Only to be used at altitude 2000 meters/6562 feet and below.

Package Content

- 1x USB 3.2 Gen 1 4K UHD at 30Hz Mini Docking Station
- 1x USB 3.2 Gen 1 Cable 1m / 3.28 ft
- 1x Power Adapter
- 1x Quick Installation Guide

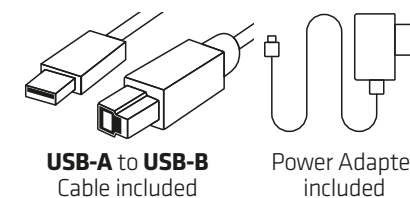

USB-A to USB-B
Cable included

Power Adapter
included



Installing the Drivers/Software

Windows™ OS

NOTE: DO NOT connect the adapter to the computer before completing the driver installation.

1. Download the latest driver from our website: www.club-3d.com
Or from www.displaylink.com
 2. How to install driver (DisplayLink) software:
You will find an extensive installation manual on the Displaylink website.
Go to www.support.displaylink.com and select the request operating system.
-

Mac® OS X™

NOTE: DO NOT connect the adapter to the computer before completing the software installation.

1. Download the latest software from our website: www.club-3d.com
Or from www.displaylink.com
 2. How to install driver (DisplayLink) software:
You will find an extensive installation manual on the Displaylink website.
Go to www.support.displaylink.com and select the request operating system.
-

Making the Connection

1. Connect the Docking Station to a HDMI* or/and DVI monitor and a computer.
The screen may temporarily go black or flash during this process.
2. Connect the USB peripherals, Ethernet, speaker and microphone to the corresponding connectors.

NOTE: When using the HDMI and the DVI connector simultaneously, the HDMI connector will not be able to reach 4K resolutions.

